



Spigot brackets

FJ25

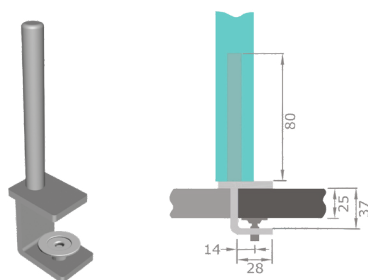


- Standard clamp fixing
- For use when attaching to a single desktop.
- Usable jaw size of 17-33mm.
- Fixed position bracket with Ø12mm spigot.
- Supplied with one pressure pad fixing.

FJ50

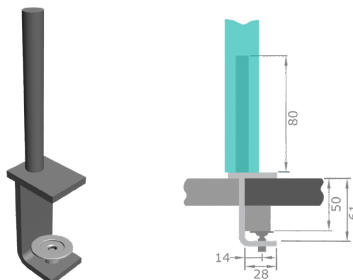


- Used for desk mounted screens when attaching around a desktop and leg frame.
- Usable jaw size of 44-57mm.
- Fixed position bracket with Ø12mm spigot.
- Supplied with one pressure pad fixing.

FJ70

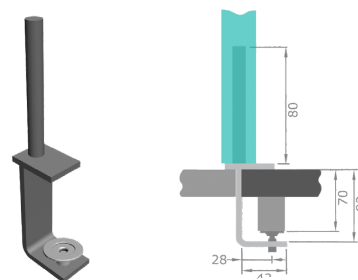


- Used for desk mounted screens when attaching around a desktop and leg frame.
- Usable jaw size of 64-77mm.
- Fixed position bracket with Ø12mm spigot.
- Supplied with one pressure pad fixing.

FJ80

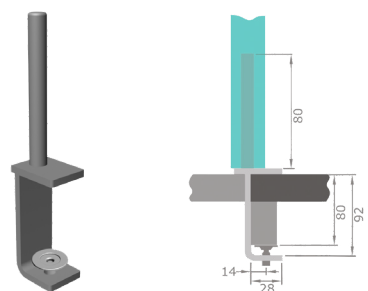


- Used for desk mounted screens when attaching around a desktop and leg frame.
- Usable jaw size of 74-87mm.
- Fixed position bracket with Ø12mm spigot.
- Supplied with one pressure pad fixing.

Spigot Slim

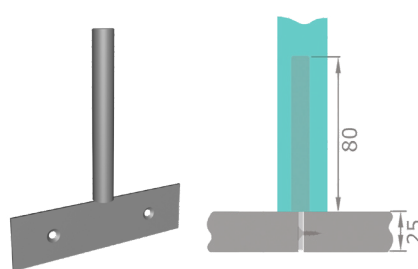


- Used for desk mounted screens when there is minimal gap, of 2mm between desk tops.
- Fixed position bracket with Ø12mm spigot.
- Screw fixings supplied.

Spigot Slab end

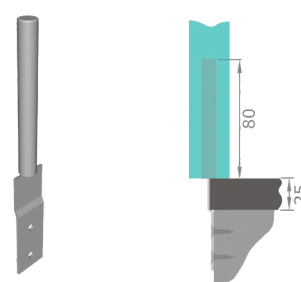


- Used for desk mounted screens when attaching onto a pedestal or cupboard cupboard back.
- Fixed position bracket with Ø12mm spigot.
- Screw fixings supplied.

Spigot interference

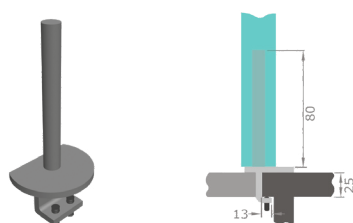


- Used for desk mounted screens when there is interference below a desk top close to the edge.
- Usable jaw size of 21-25mm.
- Fixed position bracket with Ø12mm spigot.
- Supplied with two grub screws.

Spigot Bench bracket

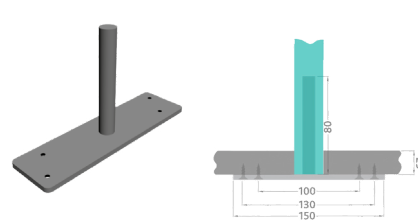

- For use when attaching desk mounted screens to a double sided bench with a 30mm gap between the desk tops.
- Bracket positions screen inline with underside of the desk tops.
- The desk screen bracket is in a fixed position with Ø12mm spigot.
- Screw fixings supplied.
- Not to be used with screen hung monitor arms.
- For fixed desktop only.

Spigot Desk edge bracket

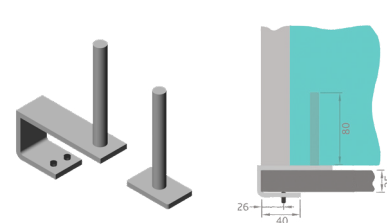

- For use when attaching return desk mounted screens around the front edge of a desk top.
- Fixed position bracket with Ø12mm spigot.
- Usable jaw size of 21-25mm.
- Supplied with one spigot spacer and two grub screws.